

15–30, 40–50 H.P.

# **Sullivan** **Palatek®**

*Rotary Screw Air Compressors*




**Sullivan-Palatek Line Shaft Compressor**

**Energy Efficient** 

**5 Year Warranty**

*Proven performance  
with exceptional design.*



## Standard Features 15-30, 40-50 H.P. Air Compressors

**COMPRESSOR:** Oil flooded rotary screw, continuous duty, industrial air compressor. **Five-year air end warranty.**

**PILLOW BLOCK:** Mounted and connects direct to compressor shaft, minimizing power loss and miss alignment.

**FRAME:** Rugged tube steel construction with built in belt tensioning slots.

**COUPLING & DRIVE:** Compressor is flange mounted to frame for positive alignment and direct driven by low maintenance coupling which carries a **five year warranty.**

**AIR INTAKE FILTER:** Heavy duty dry type with replaceable element.

**SEPARATOR TANK:** ASME coded 200 PSIG sump tank, minimum pressure/check valve, relief valve, high efficiency replaceable oil separator element, fluid level sight indicator and vented fill cap.

**COOLING SYSTEM:** Air cooled with air cooled after-cooler, spin on oil filter and factory filled with Palasyn 45 synthetic, 4,000 hour lubricoolant.

**CONTROLS:** Full modulation pneumatic control for smooth lowest possible no load power.

**INSTRUMENTATION:** Air pressure gauge and discharge temperature gauge.

**PROTECTIVE DEVICES:** High temperature and overpressure relief valve.


**MOUNTING:** Base mounted. No special foundation required.

**GENERAL:** Consult factory for options or accessories not listed. Specifications subject to change without notice.



**Line Shaft Compressor**

## SPECIFICATIONS

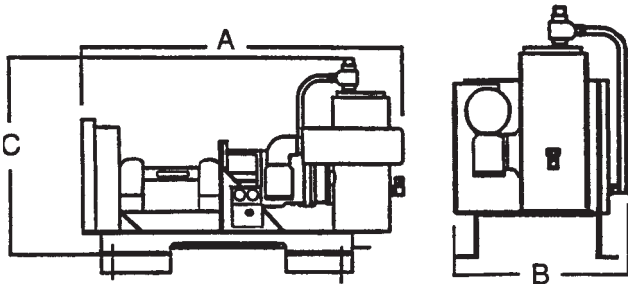

Sold and Serviced By:

BASE MTD	15/30	40/50
A	55"	59"
B	33.5"	40"
C	25"	28.5"
WEIGHT	400 LBS.	500 LBS.

\*CRATED DIMENSIONS, L-60", W-45", H-43".

\*\*ADD 100 POUNDS FOR CRATING. ALL DIMENSIONS SHOWN IN INCHES.